

Fabbricatori di ghiaccio a cubetti : E21-E25-E35-E35L-E45-E50-E60-E75-E90-E150

Ice Cube Machines : E21-E25-E35-E35L-E45-E50-E60-E75-E90-E150

150kg - 331lbs

DATI TECNICI - SPECIFICATIONS


	COND.	COMP. W	ABS. W	FUSE	Kwh/100Kg	l/h	kg	Lbs	kg	Lbs
E 150 A		2714	990	10	16,8	16,1	100	220	116	256
E 150 W		2714	675	10	13.1	113	100	220	116	256

PRODUZIONE DI GHIACCIO - ICE PRODUCTION **kg/24h - lbs/24h**



90

30 x 26 x 40 (mm)
17 gr.



Raffreddamento ad aria Air Cooled Unit

Temp. aria Air Temp. °C	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	124	135	142	150
50°	273	298	313	331
21°	118	128	135	140
70°	260	282	298	309
32°	108	118	123	127
90°	238	260	271	280
38°	92	100	105	109
100°	203	220	231	240

Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp. °C	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	115	127	133	142
50°	254	280	293	313
21°	110	122	128	132
70°	243	269	282	291
32°	105	116	121	125
90°	231	256	267	276
38°	98	113	118	122
100°	216	249	260	269



CAPACITA' DEPOSITO - BIN CAPACITY

67 kg - 148 lbs ... 3941 pcs

DIMENSIONI - DIMENSIONS

LxPxH(mm): 920 x 650 x 1279
WxDxH(in): 36 4/16" x 25 9/16" x 50 6/16"



220-240/50/1



R134a

MIN

MAX

10°C (50°F)



40°C (104°F)

5°C (41°F)



35°C (95°F)

-10%



+10%

1 Bar (14 psi)



5 Bar (70 psi)




MARCHI - MARKS



CONSUMI - ENERGY



TECNOLOGIE-TECHNOLOGIES

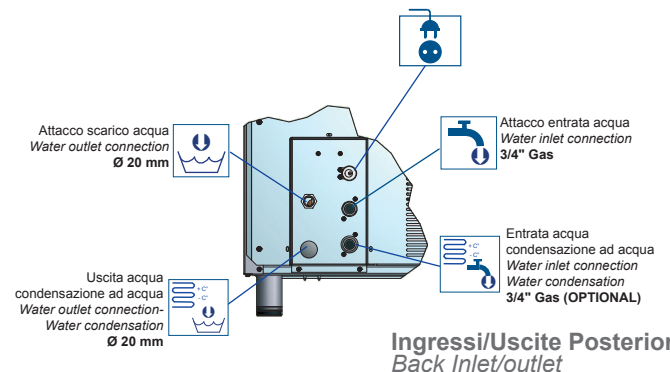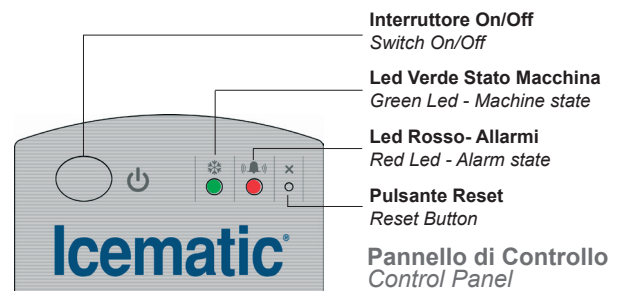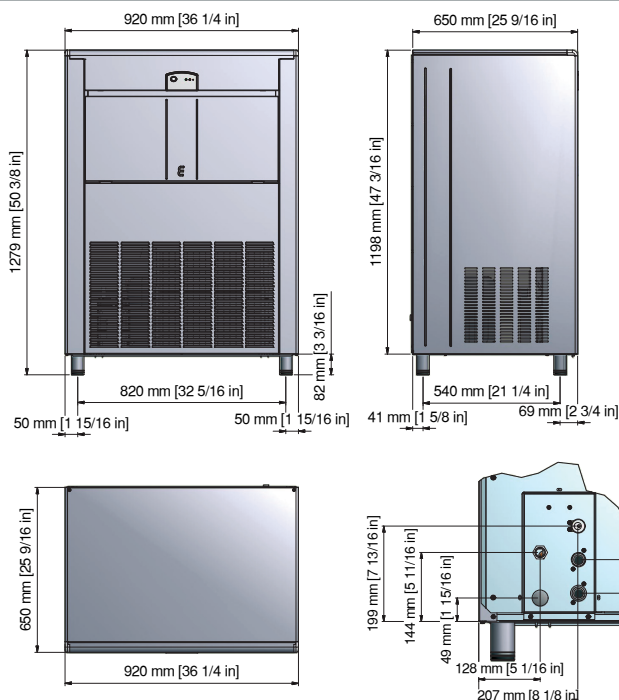

Ingressi/Uscite Posteriori
Back Inlet/outlet