













Données Techniques - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 l / h	 kg Lbs		 kg Lbs		 Ton CO2 equiv.
CS50 A		1161	680	10	32.4	2.80	48	106	56	123	0,53
CS50 W		1161	630	10	19.3	39.7	48	106	56	123	0,40




Production Glace - Ice Production

Refroidissement à air - Air Cooled Unit

Temp. Air Air Temp.	Temp. Eau / Water Temp.				
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°	48	50	52	54	
50°	106	110	115	119	
21°	41	43	45	47	
70°	90	95	99	104	
32°	33	35	37	39	
90°	73	77	82	86	
38°	27	30	32	34	
100°	60	66	71	75	

Refroidissement à eau - Water Cooled Unit

Temp. Air Air Temp.	Temp. Eau / Water Temp.				
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°	48	50	52	54	
50°	106	110	115	119	
21°	44	47	49	51	
70°	97	104	108	112	
32°	42	45	47	49	
90°	93	99	104	108	
38°	40	43	45	47	
100°	88	95	99	104	



PANNEAU DE CONTRÔLE - CONTROL PANEL



Interrupteur On/Off
Switch On/Off


Size ice regulation screw
Vis de réglage
dimension des glaçons


CAPACITE DE STOCKAGE - BIN CAPACITY

18 Kg - 39.6 lbs | 900 pcs


DIMENSIONS - DIMENSIONS

LxPxH (mm)


 500 x 580 x 800
20" 11/16 x 23" 13/16 x 31" 8/16

 560 x 640 x 960
22" 1/16 x 25" 3/16 x 38" 13/16

TYPE DE GLAÇONS - ICE TYPE



20g
WEIGHT ICE
POIDS GLACE



36
PCS / CYCLE
PZ / CICLO

COND. UTILISATIONS - OPERATING REQUIREMENTS





Chaleur rejetée / Rejected Heat 1750 W


Volume air / Air Volume 310 m³/h



220-240/50/1

R134a GWP = 1430

MIN		MAX	
10°C (50°F)		40°C (104°F)	
5°C (41°F)		35°C (95°F)	
- 10 %		+ 10 %	
1 Bar (14 psi)		5 Bar (70 psi)	

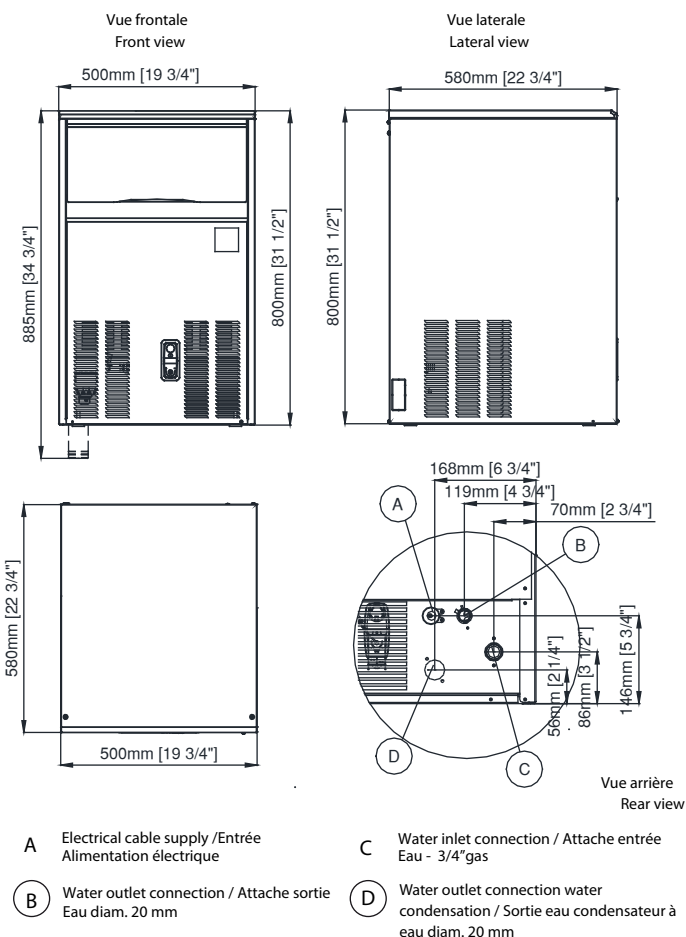

CS50 230V/1N/50Hz Self contain - Système Aspersion