













Données Techniques - Specifications


											
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l/h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
CS90A		1910	980	10	28,2	7,45	61	134	73	161	0,54
CS90W		1910	820	10	18,9	54,0	61	134	73	161	0.47

24h Production Glace - Ice Production


Refroidissement à air - Air Cooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.				
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°	82	85	87	89	
50°	181	187	192	196	
21°	75	78	80	82	
70°	165	172	176	181	
32°	59	62	64	66	
90°	130	137	141	146	
38°	48	51	53	55	
100°	106	112	117	121	





Refroidissement à eau - Water Cooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.				
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°	83	86	88	90	
50°	183	190	194	198	
21°	80	84	86	88	
70°	176	185	190	194	
32°	75	78	81	84	
90°	165	172	179	185	
38°	71	74	77	80	
100°	157	163	170	176	

Vue frontale
Front view

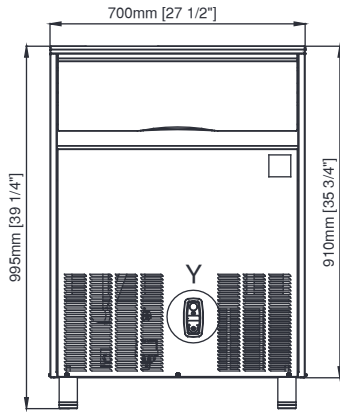

Vue latérale
Lateral view

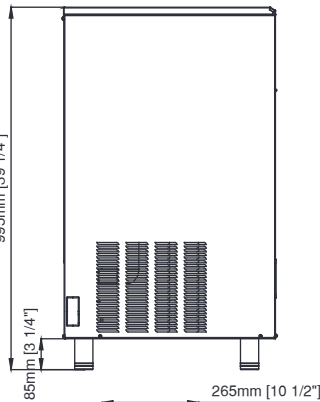

Vue arrière
Rear view

A Electrical cable supply / Entrée
Alimentation électrique


C Water inlet connection / Attache entrée
Eau - 3/4" gas

B Water outlet connection / Attache sortie
Eau diam. 20 mm

D Water outlet connection water
condensation / Sortie eau condensateur à
eau diam. 20 mm



PANNEAU DE CONTRÔLE - CONTROL PANEL

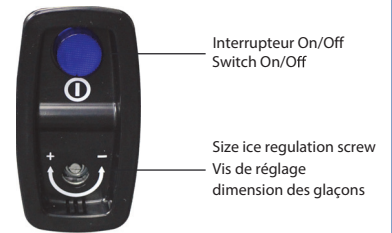



CAPACITE DE STOCKAGE - BIN CAPACITY

42 Kg - 93 lbs | 2100 pcs


DIMENSIONS - DIMENSIONS

LxPxH (mm / inch)


 700 x 580 x 995
29" 9/16 x 23" 13/16 x 39" 3/16

 760 x 630 x 1070
30" 15/16 x 25" 13/16 x 42" 2/16

TYPE DE GLAÇONS - ICE TYPE



20g
WEIGHT ICE
POIDS GLACE



56
PCS / CYCLE
PZ/CICLO

COND. UTILISATIONS - OPERATING REQUIREMENTS





Chaleur rejetée / Rejected Heat 2865 W

Volume air / Air Volume 450 m³/h



220-240/50/1

R134a GWP = 1430

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)